
MVC V11 Quick Upgrade Guide

1. Release Notes: Yealink has released new software of MShare, UVC 50/80,

Yealink RoomConnect/Camera Control Plug-in for new features including:

- 1) Wireless presentation
- 2) Camera presets features, camera graphic parameters adjustment
- 3) MVC 500 & MVC800 support Yealink Device Management Platform/Cloud Service
- 4) Camera Control Plug-in supports camera presets, USB peripherals version check and touch console brightness adjustment
- 5) Yealink RoomConnect software—USB peripherals local management and configuration tool

Here is the quick upgrade guide for MVC500 & MVC800

2. Preparation :


- 1) Make sure MShare, UVC80/50 is connected to the mini PC
- 2) Download the application '**Yealink MVC Installation package collection_1.0.6.0.msi**' from:
<http://support.yealink.com/documentFront/forwardToDocumentDetailPage?documentId=292>


3. Decompress the zip file before you copy it. Copy **Yealink MVC Installation package collection_1.0.6.0.msi** to the mini-PC

4. Click **Yealink MVC Installation package collection_1.0.6.0.msi** to install application :




Click Next button to continue

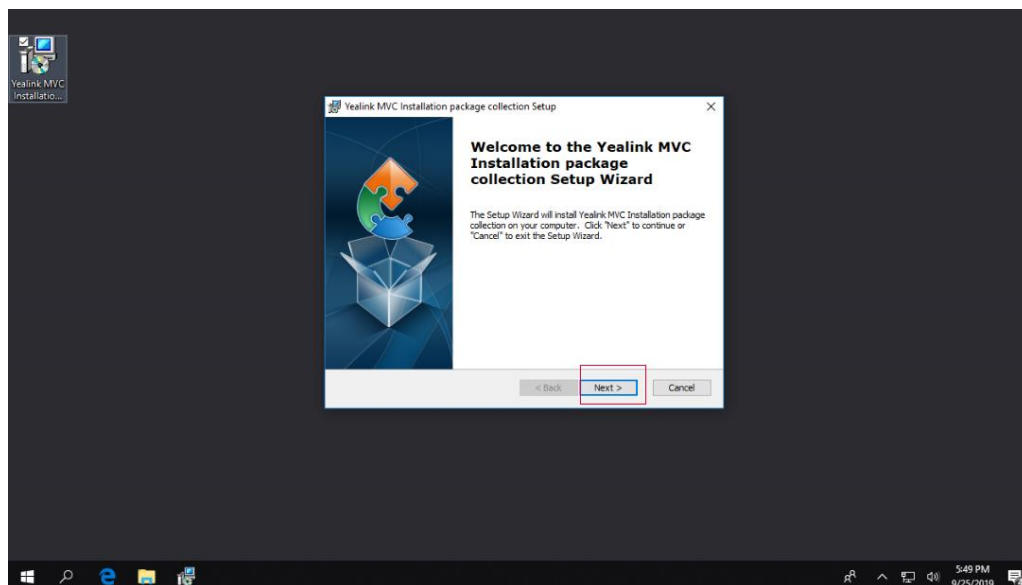


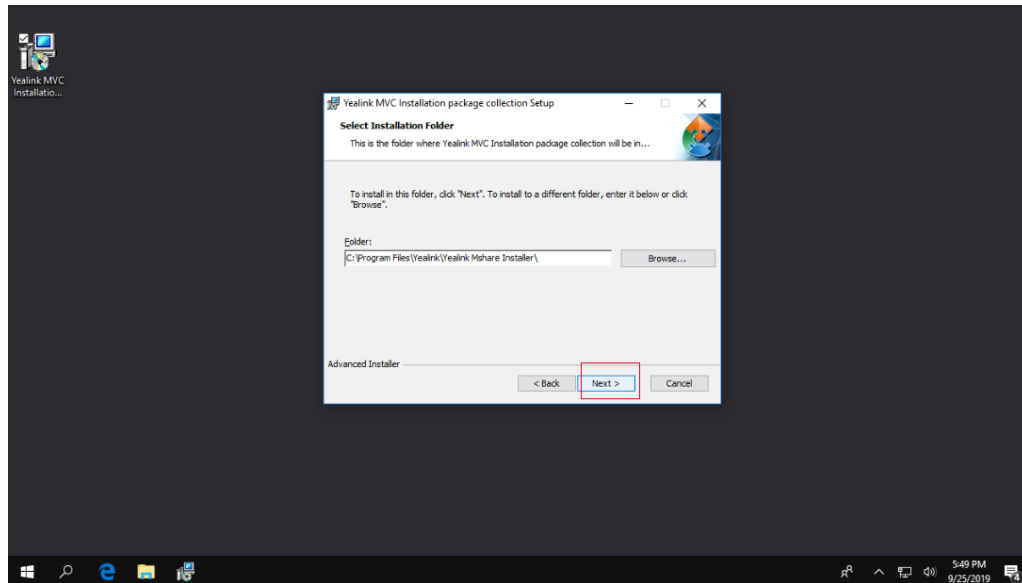


Click Install button

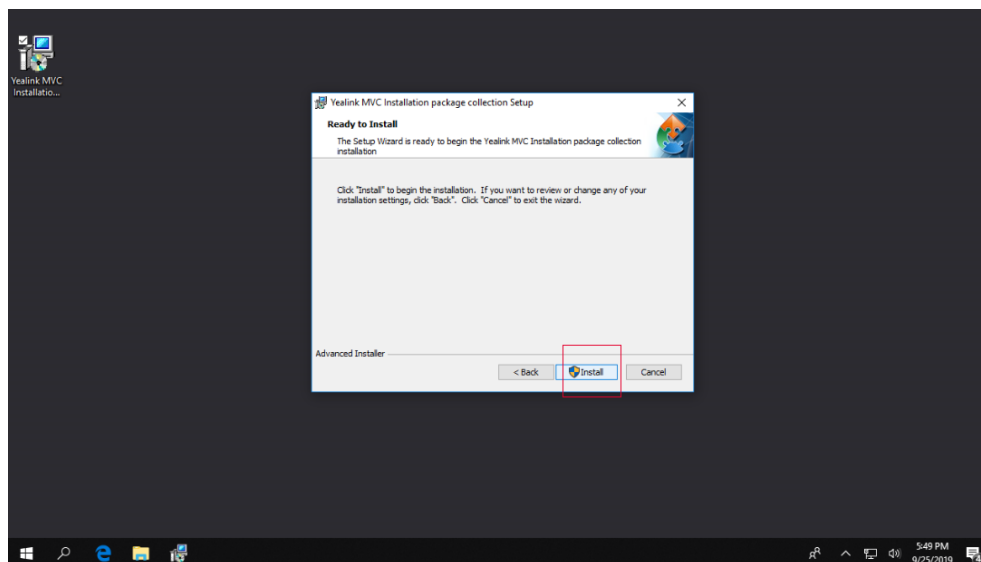

Click Finish button

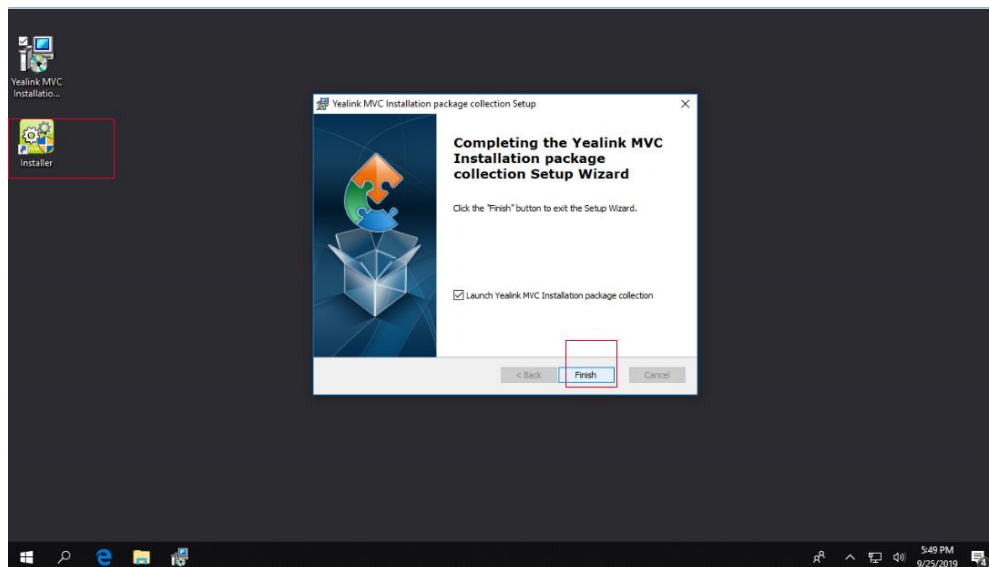


5. Start to upgrade MShare and UVC80/50 automatically, as shown below:

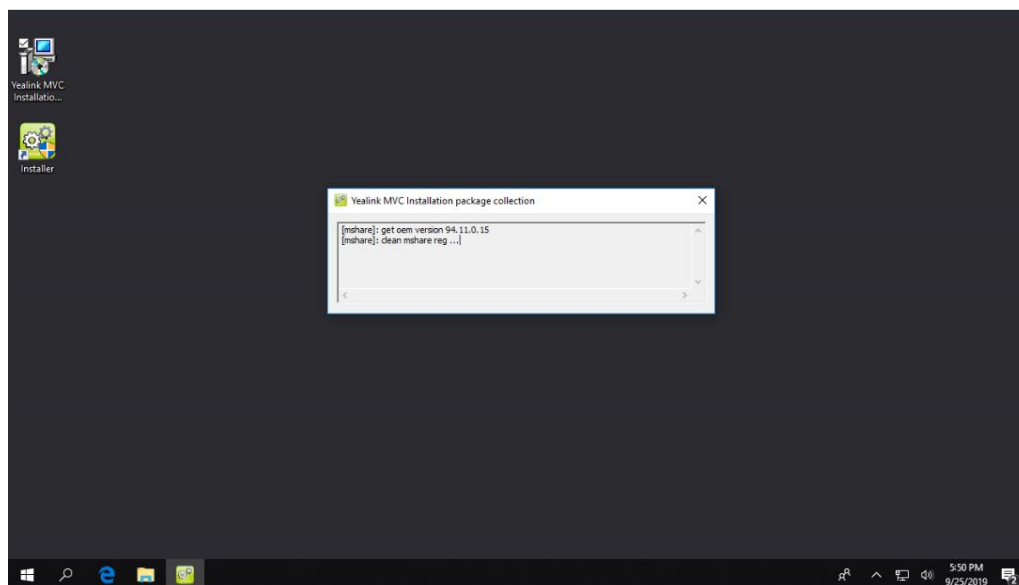


Notes: If the upgrade of MShare is **unsuccessful**, you will be prompted to remove and re-plugin your MShare. You only need to re-plugin MShare back and it will be upgraded automatically.


When the MShare is upgrading, the status of the MShare light turns to yellow flashing:

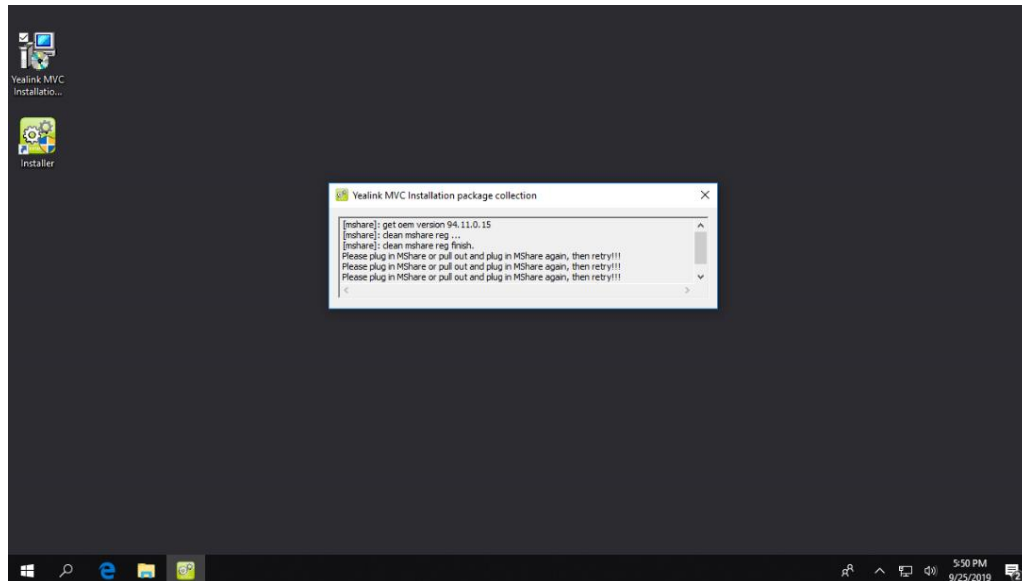


You can see an upgrade successful prompt in the Yealink MVC Installation package Collection after upgrade. Then a pop-up will come out to start installing Yealink RoomConnect.

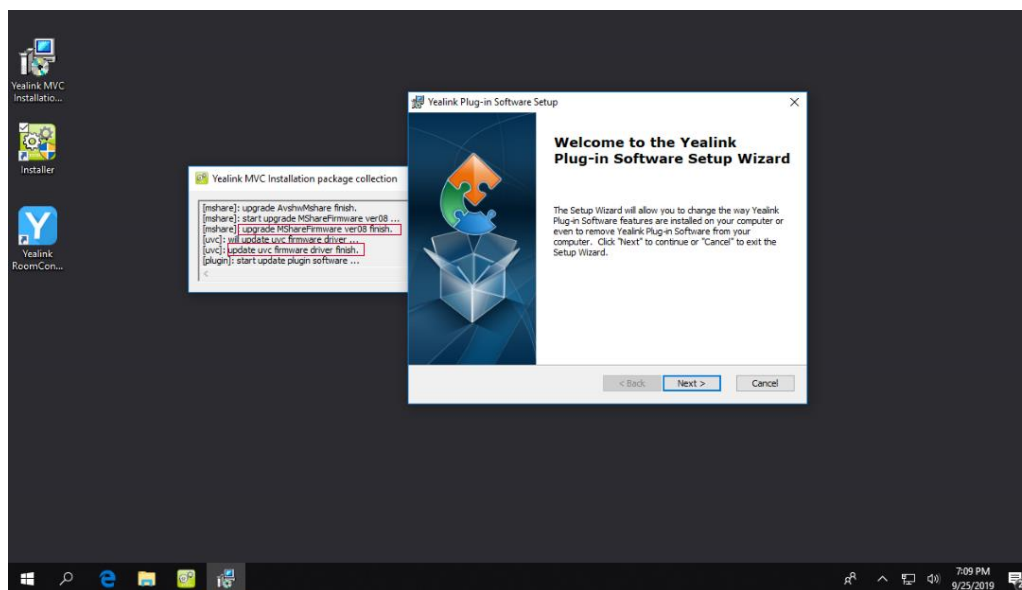


6. Start to upgrade Yealink RoomConnect automatically, as shown below:

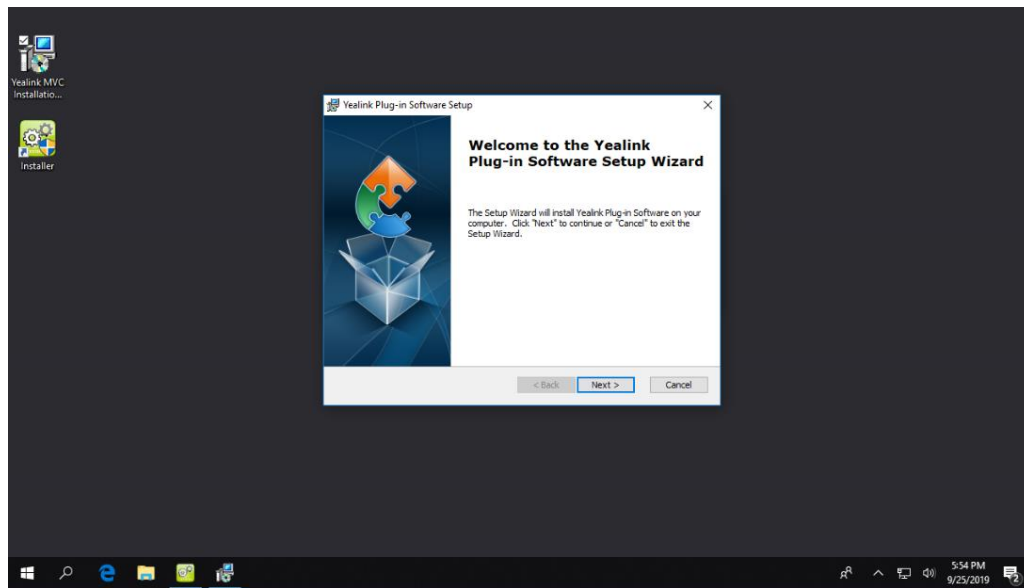


Click Next button

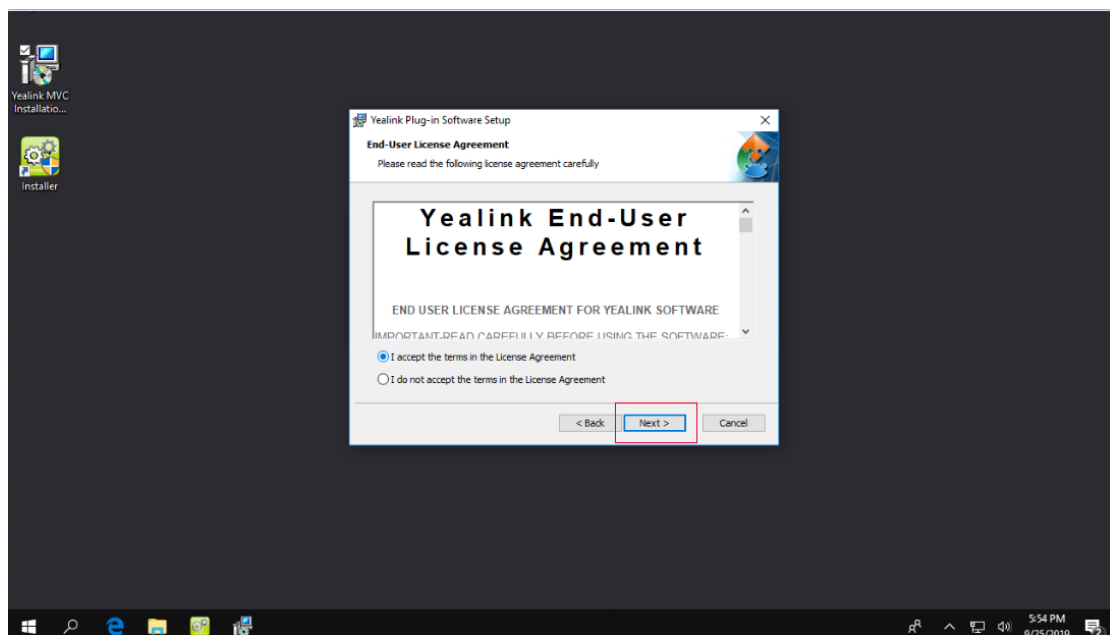

Click Next button

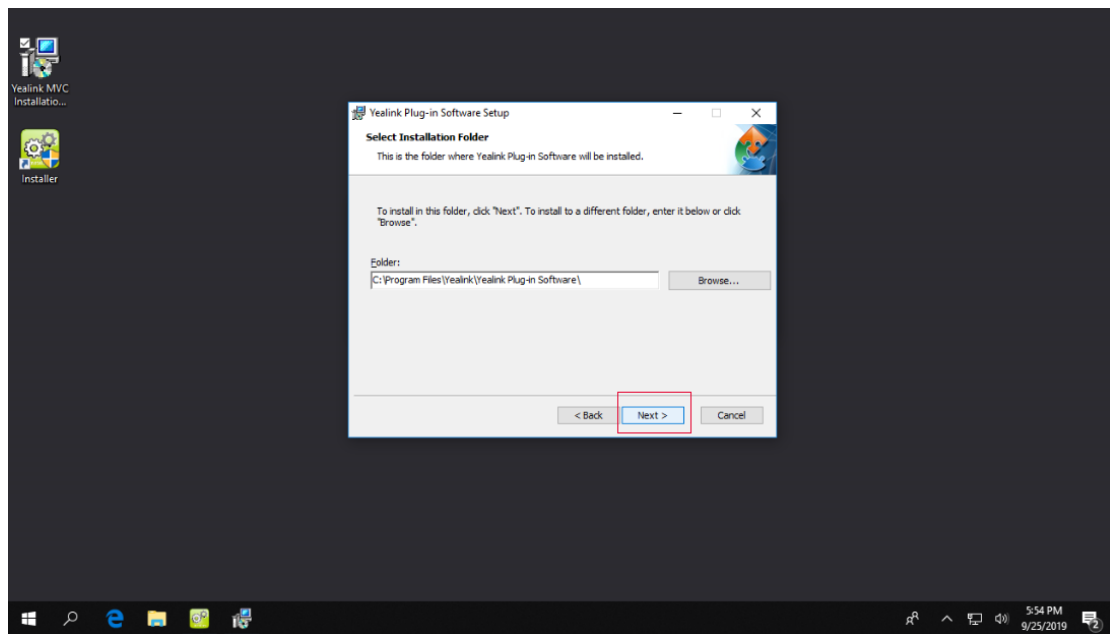


Click Install button

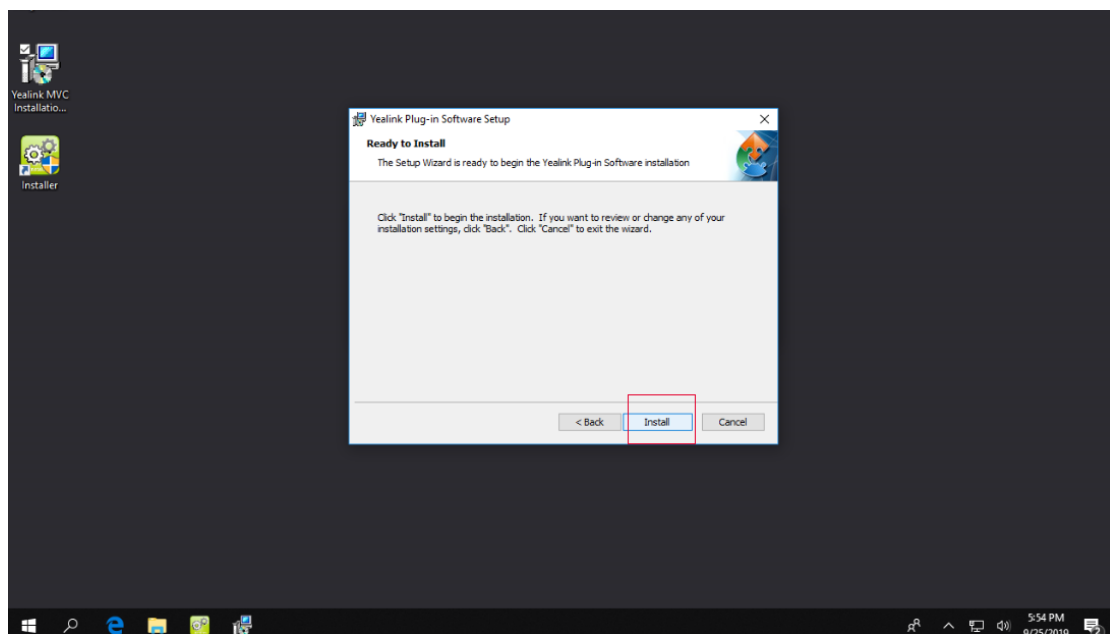

When it is finished, there will be a Yealink RoomConnect icon on the desktop as shown below:



7. After upgrade, check the version through Yealink RoomConnect, as shown below: UVC Firmware version should be **92.11.0.10** and MShare Firmware version should be **94.11.0.20**

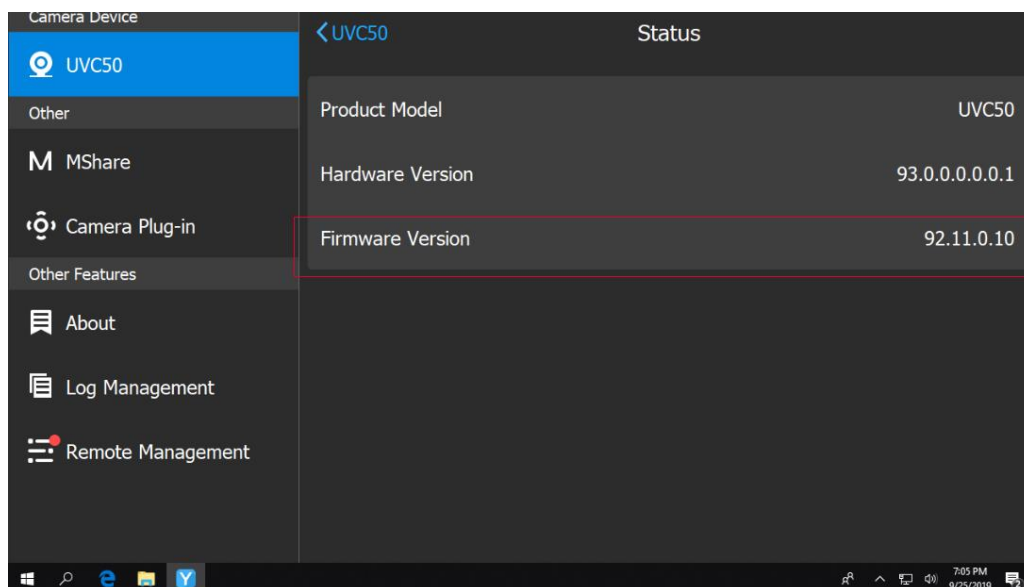

Camera Device

UVC50

Other

M

 MShare

Camera Plug-in

Other Features

About

Log Management

Remote Management

< MShare

Status

Product Model

MShare

Hardware Version

94.0.0.0.0.0.0

Firmware Version

94.11.0.20

7:05 PM

9/25/2019