

Yealink

Expansion PSTN Box CPN10 Quick Start Guide

PSTN box CPN10 is used to connect CP860/CP920 conference phones or video conferencing systems to the PSTN (Public Switched Telephone Network). It is a cost-effective solution for PSTN office. Up to 2 cascaded PSTN Boxes can be installed to CP860/CP920 conference phones or video conferencing systems, which allows you to experience the local three-way conference conveniently in excellent speech quality with PSTN. You can also record the calls with a USB flash drive when using the PSTN box.

Package Contents



PSTN Box
CPN10



3m PSTN
Cable




Double-side
Tape




Quick Start Guide

Hardware Component Instructions



Installing the Expansion PSTN Box

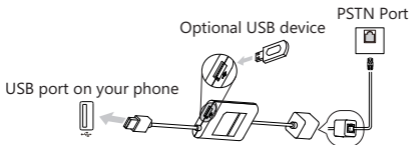

Note: USB flash drive should be purchased separately.

Installing two PSTN boxes for three-way local conference, as shown below:



You can fix the two cascaded PSTN boxes by the double-side tape.

Configuring the PSTN Account

When PSTN box is connected successfully, your screen prompts you go to the PSTN account screen.

Configuring the PSTN account:

1. Press OK key to enter the PSTN account screen.
2. Select the desired PSTN account.
3. Select **Enabled** or **Disabled** to activate or deactivate the PSTN account.
4. (Optional.) Enter the PSTN account label.
5. Save the change.

PSTN account is also configurable at the desired path:

For CP860/CP920 conference phone: navigate to **Menu->Settings->Advanced Settings** (default password: admin)->**Accounts**.

For video conference system: navigate to **More->Setting->Advanced**(default password: 0000)->**PSTN Account**.

Setting the default account (Only applicable to CP860/CP920 Conference phone):

1. Press **Menu->Settings->Advanced Settings** (default password: admin)->**Accounts**.
2. Select the desired PSTN account.
3. Press the **Default** soft key.

Viewing the PSTN Account Status

If you are using CP860/CP920 conference phone, do one of the following:

- Press OK key when the phone is idle, and then press **More->Accounts**.
- Navigate to **Menu->Status->More->Accounts**.

If you are using video conferencing system, do the following:

1. Navigate to **More->Status->Account**.

PSTN转接盒CPN10快速入门指南

PSTN转接盒CPN10实现了CP860/CP920会议话机或会议电视终端与PSTN（公共交换电话网络）网络的自由连接，为只有PSTN接口的中小型会议室，提供高效便捷的解决方法。一台CP860/CP920会议话机或会议电视终端最多支持2个转接盒级联，你可以使用这种级联方式在PSTN网络中进行三方会议通话。PSTN转接盒带有USB接口，你可以在通话中连接U盘进行录音。

包装清单



PSTN转接盒
CPN10



3米 PSTN 线




双面胶




快速入门指南

硬件介绍




连接转接盒

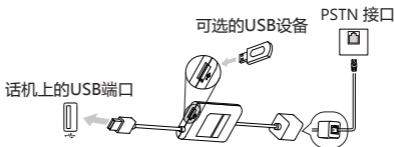

说明：USB设备需要另外购买。

PSTN转接盒级联（实现PSTN三方会议），如下所示：



你可以使用附带的双面胶固定两个转接盒。

设置模拟电话线路账号

PSTN转接盒连接成功后，液晶界面提示你进入模拟电话线路设置界面。

设置模拟电话线路：

1. 选择**确定**进入模拟电话线路设置界面。
2. (可选) 选择相应的模拟电话线路。
3. 选择**启用**或**禁用**模拟电话线路。
4. (可选) 输入模拟电话线路的标签。
5. 保存操作。

模拟电话线路也可以通过以下路径设置：

对于CP860/CP920会议电话：导航至**菜单**->**设置**->**高级设置** (默认密码：admin) ->**账号**。

对于会议电视终端：导航至**更多**->**设置**->**高级设置** (默认密码：0000) ->**模拟电话线路**。

设置默认账号 (只适用于CP860/CP920会议电话)：

1. 按**菜单**->**设置**->**高级设置**(默认密码：admin)->**账号**。
2. 选择相应的模拟电话线路。
3. 按**默认**软键。

查看模拟电话线路状态

对于CP860/CP920会议电话执行以下任一操作：

- 在待机界面按OK键，然后按**更多->账号**。
- 导航至**菜单->状态->更多->账号**。

对于会议电视终端执行以下操作：

1. 导航至**更多->状态->账号**。