




Bluetooth Wireless Microphones

CPW90-BT



Quick Start Guide (V1.1)

Package Contents

The following items are included in your package. If you find anything missing, contact your system administrator.



Charging Cradle



Bluetooth Wireless
Microphone×2



1.8m
Micro USB Cable



Power Adapter



BT42
Bluetooth USB Dongle
Optional



Quick Start Guide

Note: If bluetooth wireless microphones work with VC200 video conferencing endpoint, you do not need to purchase BT42 Bluetooth USB Dongle. If bluetooth wireless microphones work with VC500/VC800/VC880 video conferencing system, you need to purchase BT42 Bluetooth USB Dongle.

Component Instruction



Battery Indicator



Built-in Microphone

Mute Button



Charging Slot

Charging the Bluetooth Wireless Microphones



① Put the bluetooth wireless microphones on the charger.

② Connect to the power source.

② 1.8m Micro USB Cable

During charging, the battery indicator illuminates solid red. When the battery capacity reaches 100%, the battery indicator illuminate solid green. When you charge the bluetooth wireless microphones, the bluetooth wireless microphones will start automatically. You can also long tap the mute button on the bluetooth wireless microphone for 3 seconds to turn it on.

Note: If it is the first time you use the bluetooth wireless microphones, you need to fully charge them.

If the wireless microphones are not in use, we still recommend you to charge them even when the battery is full.

Pairing with the Video Conferencing System

If you purchase video conferencing system and bluetooth wireless microphones together, they are already paired. Just turn the bluetooth wireless microphones on to use them. If the model of your video conferencing system is VC500/VC800/VC880, make sure a BT42 Bluetooth USB Dongle is connected before you use the bluetooth wireless microphones.

If you purchase bluetooth wireless microphones separately, you need to pair them with video conferencing system manually.

To pair bluetooth wireless microphones with video conferencing system:

1. On your remote control, navigate to **More->Setting->Video & Audio->Wireless Micphone**.
2. Select **Add Wireless Micphone**.
3. Place the bluetooth wireless microphones on the charger and long press the mute button for 5 seconds until the mute LED indicator fast flashes yellow.
The bluetooth wireless microphones are paired with the video conferencing system.

Unbinding the Paired Bluetooth Wireless Microphones

If you want to pair new bluetooth wireless microphones with your video conferencing system, you need to unbind old microphones.

1. On your remote control, navigate to **More->Setting->Video & Audio->Wireless Micphone**.
2. Select the desired bluetooth wireless microphone and press the OK key.
3. Select **Cancel Pair**.
The screen prompts "Unbind device?"
4. Select **OK**.

Finding the Paired Bluetooth Wireless Microphones

1. On your remote control, navigate to **More->Setting->Video & Audio->Wireless Micphone**.
2. Select the desired bluetooth wireless microphone and press the OK key.
3. Select **Find**.
The mute LED indicator flashes red and green alternately.
4. Select **Cancel**.

Muting or Unmuting the Bluetooth Wireless Microphones

1. Tap the mute button to mute it.
The mute LED indicator illuminates solid red.
2. Tap the mute button again to unmute it.

About Yealink

Yealink (Stock Code: 300628) is a global leading unified communication (UC) terminal solution provider that primarily offers video conferencing systems and voice communication solutions. Founded in 2001, Yealink leverages its independent research and development and innovation to pursue its core mission: "Easy collaboration, high productivity." The company's high-quality UC terminal solutions enhance the work efficiency and competitive advantages of its customers in over 100 countries. Yealink is the world's second-largest SIP phone provider and is number one in the China market.

Technical Support

Visit Yealink WIKI (<http://support.yealink.com/>) for the latest firmware, guides, FAQ, Product documents, and more. For better service, we sincerely recommend you to use Yealink Ticketing system (<https://ticket.yealink.com>) to submit all your technical issues.



CPW00-BT-EN

YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.

Web: www.yealink.com


Addr: 309, 3th Floor, No.16, Yun Ding North Road,
Huli District, Xiamen City, Fujian, P.R. China

Copyright © 2018 Yealink Inc. All rights reserved.

Yealink

蓝牙无线麦克风

CPW90-BT



快速入门指南 (V1.1)

包装清单

包装箱包含以下配件。如果发现遗失任何配件，请联系你的系统管理员。



充电底座



蓝牙无线麦克风×2



1.8m USB线



电源适配器



USB蓝牙设备
BT42
可选



快速入门指南

说明: 如果蓝牙无线麦克风搭配VC200会议电视终端使用，你无需购买USB蓝牙设备BT42。如果蓝牙无线麦克风搭配VC500/VC800/VC880会议电视终端使用，你必须购买BT42。

组件介绍



电源指示灯


内置麦克风

静音键



充电口

充电

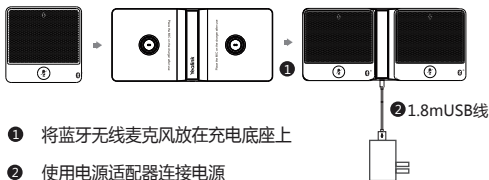

在充电过程中，蓝牙无线麦克风上的电源指示灯亮红色，充满时亮绿色。一旦充电，蓝牙无线麦克风会自动开机。未在充电状态下时，你也可以长按静音键3秒手动开机。

说明: 如果首次使用蓝牙无线麦克风，请充满电。

即使不使用蓝牙无线麦克风时，我们也建议让它处于充电状态。

配对蓝牙无线麦克风和会议电视终端

如果你购买的是蓝牙无线麦克风和会议电视终端组合，二者默认自动配对，开机即可使用。如果会议电视终端为VC880/VC800/VC500，在使用前，你还需要接入USB蓝牙无线设备BT42。

如果你单独购买了蓝牙无线麦克风，你需要手动配对会议电视终端。下面介绍如何配对。

配对蓝牙无线麦克风和会议电视终端:

1. 通过遥控器选择**更多->设置->音视频设置->无线麦**。
2. 选择**添加无线麦**。
3. 将蓝牙无线麦克风放在充电底座上，长按静音键5秒钟不放，直到静音键快闪黄色灯。
蓝牙无线麦克风和会议电视终端自动配对。

取消配对蓝牙无线麦克风和会议电视终端

你可以将会议电视终端和蓝牙无线麦克风取消配对，使会议电视终端可以连接新的蓝牙无线麦克风。下面介绍如何取消配对。

取消配对蓝牙无线麦克风和会议电视终端:

1. 通过遥控器选择**更多->设置->音视频设置->无线麦**。
2. 选择已配对的蓝牙无线麦克风，按OK键选择**取消配对**。
3. 选择**确定**。

查找已配对的蓝牙无线麦克风

查找已配对的蓝牙无线麦克风:

1. 通过遥控器选择**更多->设置->音视频设置->无线麦**。
2. 选择已配对的蓝牙无线麦克风，按OK键选择**查找**。
蓝牙无线麦克风的静音键红绿灯交叉闪烁。
3. 选择**取消停止查找**。

将蓝牙无线麦克风静音或取消静音

将蓝牙无线麦克风静音或取消静音:

1. 按蓝牙无线麦克风上的静音键开启静音。
静音键红色常亮。
2. 再次按静音键取消静音。

关于亿联

亿联网络（股票代码：300628）成立于2001年，是全球领先的统一通信解决方案提供商，主营视频会议和语音通信方案，坚持自主研发创新，致力于使沟通更简单、更高效。亿联网络在全球100多个国家提供音视频与协作等高品质网络通信产品，协助用户提升办公效率和竞争力。亿联网络SIP话机市场占有率为中国第一、全球第二。

技术支持

请访问Yealink官网(<http://support.yealink.com/>)获取最新的固件、指南、常见问题解答和产品手册等。为了提供更好的服务，推荐你使用Yealink Ticketing系统（<https://ticket.yealink.com>）反馈所有技术问题。



CPW90-BT-CN

厦门亿联网络科技股份有限公司

网址：www.yealink.com.cn

地址：厦门市湖里区云顶北路16号三楼309

版权©亿联网络科技股份有限公司2018